


# OFV-505/503 Vibrometer Sensor Head

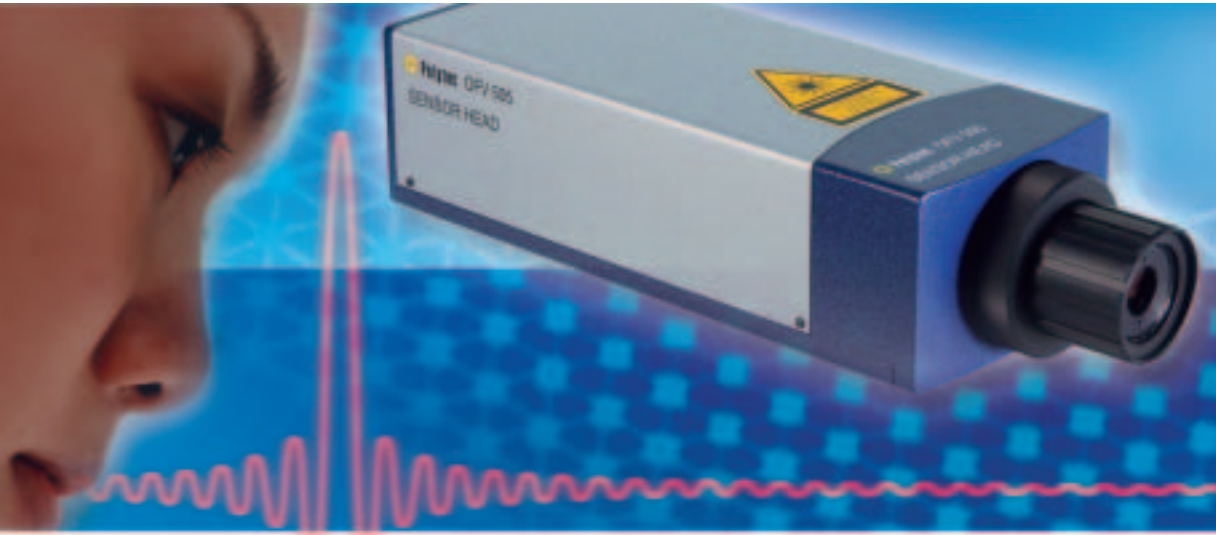

## Modular Vibrometer System

- OFV-5000  
Vibrometer Controller  
– Velocity Decoders  
– Displacement Decoders
- OFV-505/503  
Standard Sensor Heads
- OFV-551/552  
Fiber Interferometers
- OFV-534  
Compact Sensor Head

## High Performance Vibration Measurement

Polytec Laser Doppler Vibrometers are used to precisely measure mechanical vibrations, quickly, easily and free from cross-talk or feedback problems. They operate on the Doppler principle, measuring back-scattered laser light from a vibrating structure, to determine its vibrational velocity and displacement.

### The Sensor Head – The Heart of a Quality Vibrometer System

The sophisticated optical design of the OFV-505 and OFV-503 heads offers excellent performance including exceptional optical sensitivity. The OFV-505 features autofocus and focus memory. Coupled to the high-end, modular OFV-5000 Vibrometer Controller (see separate data sheet), the OFV-505/503 sensor heads take full advantage of the high resolution processing of the OFV-5000 – digital as well as analog. OFV-505 and OFV-503 are at the heart of a range of universal and expandable non-contact vibrometer systems.

### Applications

Single point sensor heads are used for applications in the automotive and aerospace industries, on electrical appliances or machines, for monitoring buildings, on-line quality testing and other mechanical production, research and development projects.

### Key Features and Benefits

- **Practical, Easy, “Point & Measure” Capability**
- **Low Power, Visible, Eye-Safe (Class 2) Laser** provides outstanding optical sensitivity.
- **Remote Focus Control with Focus Memory**  
Motorized focusing can be made either via the OFV-5000 control panel or software. Focus positions can be stored and recalled from controller memory.
- **Auto Focus (with OFV-5000)**  
The OFV-505 sensor head can auto-sense the return signal quality and automatically set the focus for an optimal signal.
- **Expandability Options**  
The OFV-505 sensor and OFV-5000 controller are fully upgradeable to Polytec’s 1-D and 3-D Scanning Vibrometer systems for full field vibration analysis.

## OFV-505/503 Technical Data


General Specifications	
Operating temperature range	+5 °C ... +40 °C (41 °F ... 104 °F)
Relative humidity	max. 80 %, non-condensing
Weight	3.4 kg
Dimensions [W x H x L]	120 mm x 80 mm x 345 mm (4.7 in x 3.1 in x 13.6 in)
Laser wavelength	633 nm, visible laser beam
Laser protection class	Class 2 He-Ne laser, < 1 mW, eye-safe
* Auto Focus	only OFV-505
Remote Focus	only OFV-505
Manual focusing	Electrical control of the internal focusing unit (mechanically isolated)
Maximum stand-off distance	~ 300 m (with OFV-SLR, surface dependent)
Coherence maxima	234 mm + n·204 mm; n = 0, 1, 2, 3, ... measured from the focusing ring
Compatibility	OFV-505 recommended for OFV-5000 controller; OFV-503 recommended for OFV-2XXX series controllers
PSV-Upgradeable	only OFV-505

\* Depending on surface properties

OFV-505 and OFV-503 Interchangeable Lens Options – Technical Data				
Front lens	OFV-SR short range	OFV-MR mid range	OFV-LR* long range	OFV-SLR super long range
Focal length [mm]	30	60	100	200
Min. stand-off distance [mm]	60	185	530	1800
Aperture diameter (1/e <sup>2</sup> ) [mm]	3.4	6.8	11.3	22.6
Typical spot size in µm at				
100 mm	25	–	–	–
200 mm	49	25	–	–
500 mm	121	54	18	–
1000 mm	245	112	62	–
2000 mm	500	235	135	60
3000 mm	750	356	210	96
5000 mm distance	1260	604	356	168
Each additional meter plus [µm]	240	126	74	36

\* Default configuration

For mounting and positioning of the OFV-505/503 Sensor Heads, a wide range of accessories including tripods, tilt and traverse stages is available. Please contact your local vibrometer sales engineer or visit our website [www.polytec.com/vibrometers](http://www.polytec.com/vibrometers) for more detailed information.



### Polytec GmbH (Germany)

Polytec-Platz 1-7  
76337 Waldbronn  
Tel. +49 7243 604-0  
Fax +49 7243 69944  
info@polytec.de

### Polytec France S.A.S.

Bâtiment Orion – 1<sup>er</sup> étage  
39, rue Louveau  
92320 Châtillon  
Tel. +33 1 496569-00  
Fax +33 1 57214068  
info@polytec.fr

### Polytec Ltd.

(Great Britain)  
Lambda House, Batford Mill  
Harpenden, Herts AL5 5BZ  
Tel. +44 1582 711670  
Fax +44 1582 712084  
info@polytec-ltd.co.uk

### Polytec Japan

Arena Tower, 13<sup>th</sup> floor  
3-1-9, Shinyokohama,  
Kohoku-ku, Yokohama-shi,  
Kanagawa, 222-0033  
Tel. +81 45 478-6980  
Fax +81 45 478-6981  
info@polytec.co.jp

### Polytec, Inc. (USA)

North American Headquarters  
16400 Bake Parkway  
Suites 150 & 200  
Irvine, CA 92618  
Tel. +1 949 943-3033  
Fax +1 949 679-0463  
info@polytec.com

Central Office  
1046 Baker Road  
Dexter, MI 48130  
Tel. +1 734 253-9428  
Fax +1 734 424-9304

East Coast Office  
25 South Street, Suite A  
Hopkinton, MA 01748  
Tel. +1 508 417-1040  
Fax +1 508 544-1225